

DAICEL CHIRAL TECHNOLOGIES GLOBAL APPLICATION CENTRE

Pretomanid

CHROMATOGRAPHIC CONDITIONS

Column: Two CHIRALPAK® IM [4.6 x 250mm, 5µm]

Part No: 92325

Mobile Phase: n-Hexane: Ethanol (60/40, v/v)

Column Oven Temperature: 40°C


UV Detection: 315 nm

Flow Rate: 1.0 ml/min

Diluent: Mobile Phase

Sample Concentration: 1.0mg/ml

Pretomanid

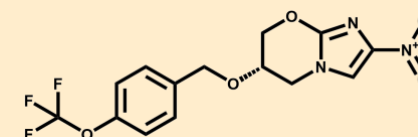

SEPARATION PERFORMANCE

t_{R1} : 10.1

N_1 : 5878

T_1 : 1.2

t_{R2} : 11.9

N_2 : 6374

T_2 : 1.1

R_s : 3.2

